

### ■DESCRIPTION


The FV-200CA-AS Amplifier Changeover Panel is used to automatically changeover FV-200 series fault duty amplifier to working standby amplifier. 1 unit of FV-200CA-AS Can handle up to 6 nos. of FV-200 series amplifier.

### ■SPECIFICATIONS


Power Source	24 V DC (operating range : 21.6 – 26.4 V), M3 screw terminal
Current Consumption	240 mA
No. of Input Channel	6 Duty Amplifier, 1 Standby Amplifier
No. of Output Channel	6 Output
Failure Detection	Fault Buzzer with Buzzer CTRL switch
Display	Power indicator (Green), Changeover indicator (Orange), Fault indicator (Red) Buzzer CTRL indicator (Red)
Operating Temperature	0 °C to +40 °C (14 °F to 104 °F)
Operating Humidity	Under 90% RH (no condensation)
Finish	Front Panel : Aluminum, Black, Alumite
Dimensions	482 (W) X 44 (H) X 343.8 (D) mm (18.98" x 1.73" x 13.54")
Weight	2.6 kg (5.73 lb)
Accessory	Removable terminal plug (2pins)...3, Removable terminal plug (8pins)...4

### ■APPEARANCE


#### Rear View

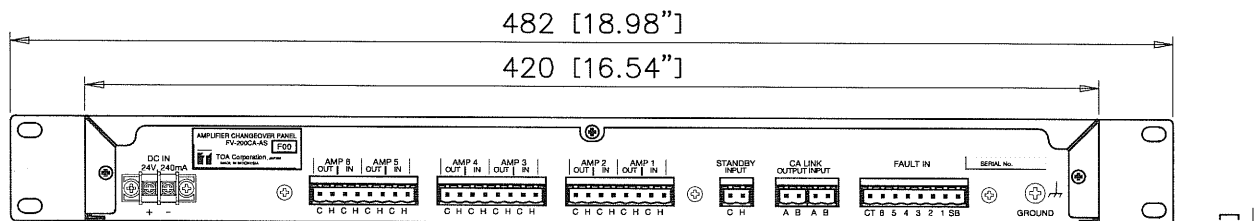

#### Front View

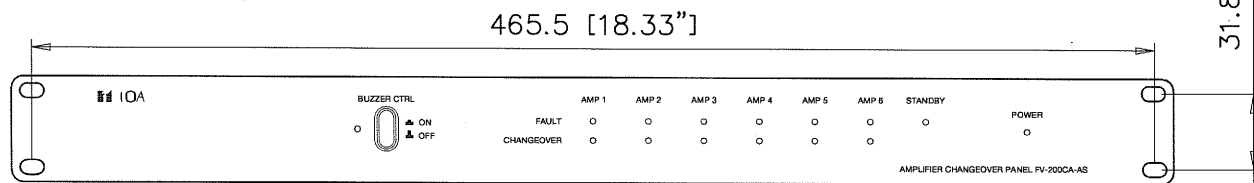

#### Right View

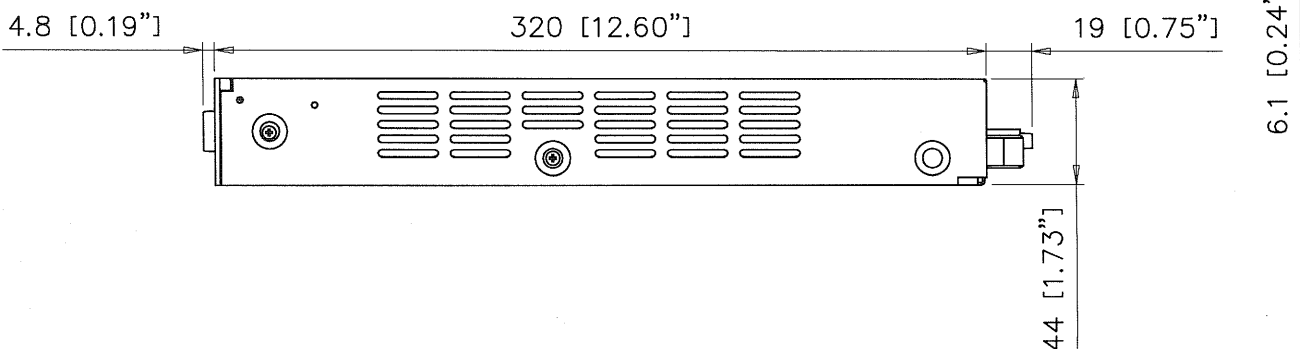

UNIT : mm SCALE : 1/3