

DESCRIPTION


The LC-100-AS is a high impedance to line level Converter that used mainly in project to convert speaker line signal to audio line level.

SPECIFICATIONS

* 0 dB = 1 V

Input	10 kΩ, Unbalanced, pluggable terminal block with input selector: 100 V, 70 V, 50 V, 25 V
Output	Line Out : 0 dB with adjustable volume, 600 Ω, unbalanced, pluggable terminal block Aux Out : -20 dB = 100 mV, 600 Ω, unbalanced, RCA pin jack
Frequency Response	20 Hz - 20 kHz
Operating Temperature	0 °C to +40 °C
Finish	Upper Case : Surface-treated steel plate, painting black Lower Case : Surface-treated steel plate
Dimensions	129 (W) × 41 (H) × 90 (D) mm (5.08" × 1.61" × 3.54")
Weight	256 g (0.56 lb)
Accessory	Removable Terminal Plug ...1

APPEARANCE

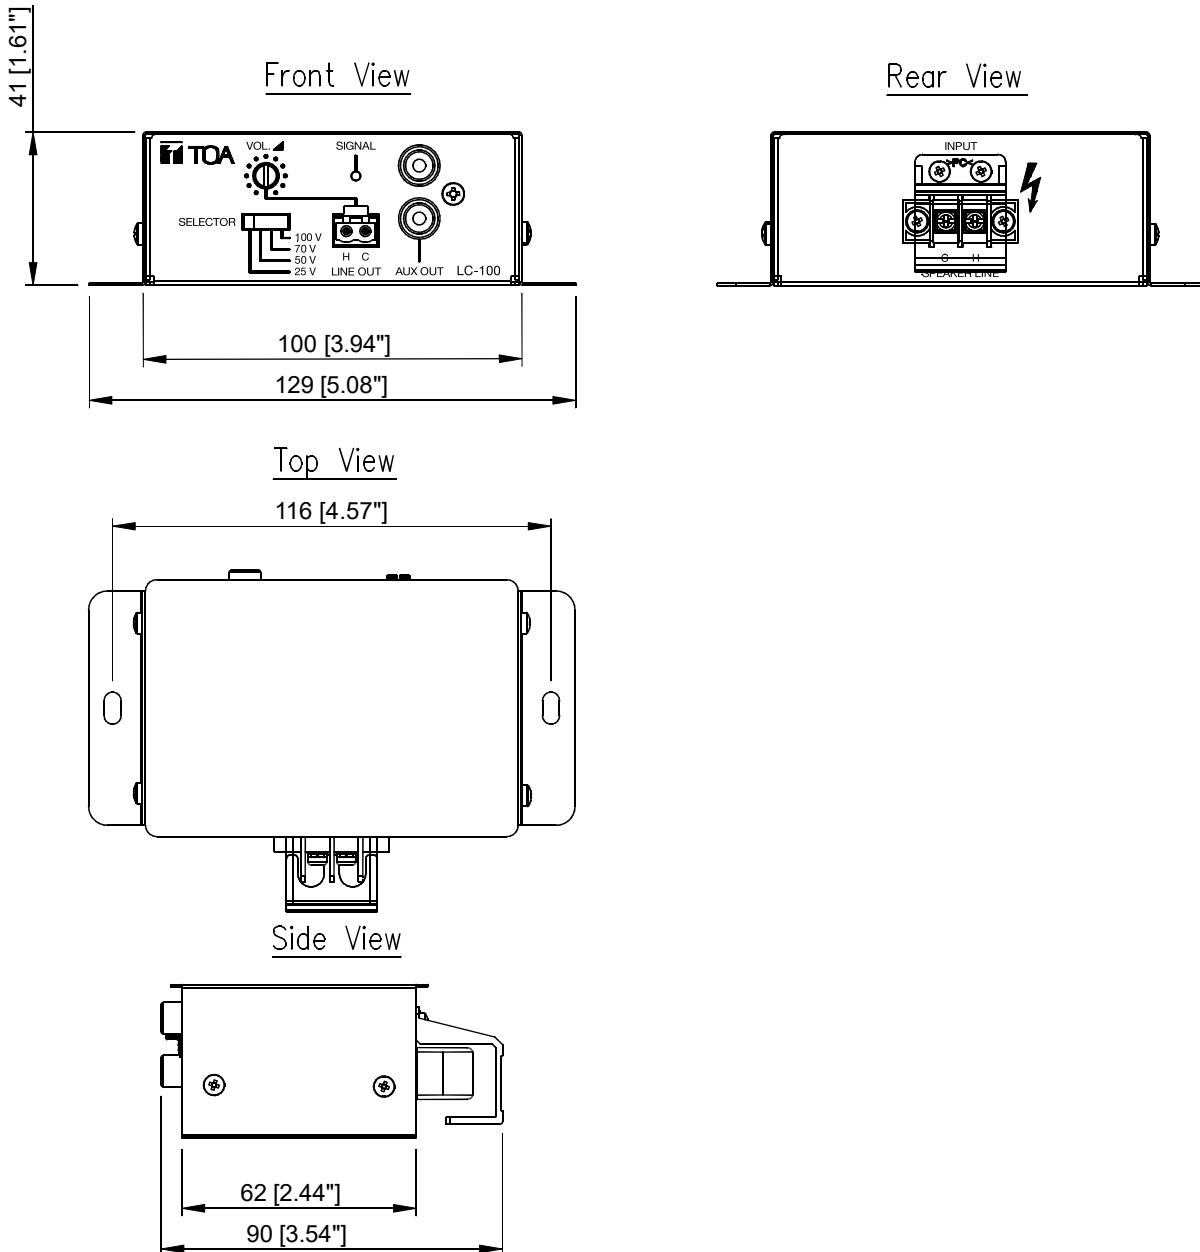

UNIT:mm SCALE:1/2