



DESCRIPTION

The SR-C15B Sub-woofer system is designed to be used in conjunction with the SR-C8L or SR-C8S Line array speaker.  
Recommended digital speaker processor is the DP-SP3 (option).

SPECIFICATIONS

|                         |                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------|
| Enclosure               | Bass-reflex type                                                                             |
| Power Handling Capacity | Continuous program: 450 W                                                                    |
| Rated Impedance         | 8 Ω                                                                                          |
| Sensitivity             | 93 dB (1 W, 1 m)                                                                             |
| Frequency Response      | 40 - 400 Hz (when recommended parameters are applied by the optional DP-SP3)                 |
| Crossover Frequency     | 125 Hz (when recommended parameters are applied by the optional DP-SP3)                      |
| Speaker Component       | 38 cm (15") cone-type                                                                        |
| Input Connector         | M4 screw terminal, distance between barriers: 10 mm (0.39") and Neutrik NL4MPXX × 2          |
| Finish                  | Enclosure: Plywood, black, urethane paint<br>Front grille: Punched steel plate, black, paint |
| Dimensions              | 526.6 (W) × 594.8 (H) × 550 (D) mm (20.73" × 23.42" × 21.65")                                |
| Weight                  | 41 kg (90.39 lb)                                                                             |
| Accessory               | M8 connection bolt ×4                                                                        |
| Option                  | Rigging frame: SR-RF8<br>Digital speaker processor: DP-SP3                                   |

APPEARANCE

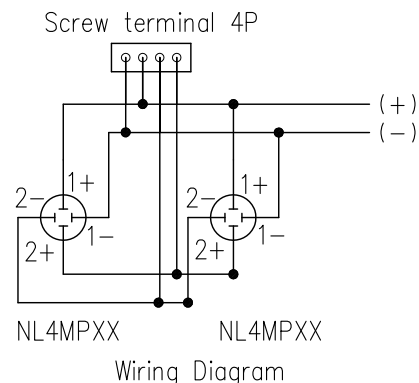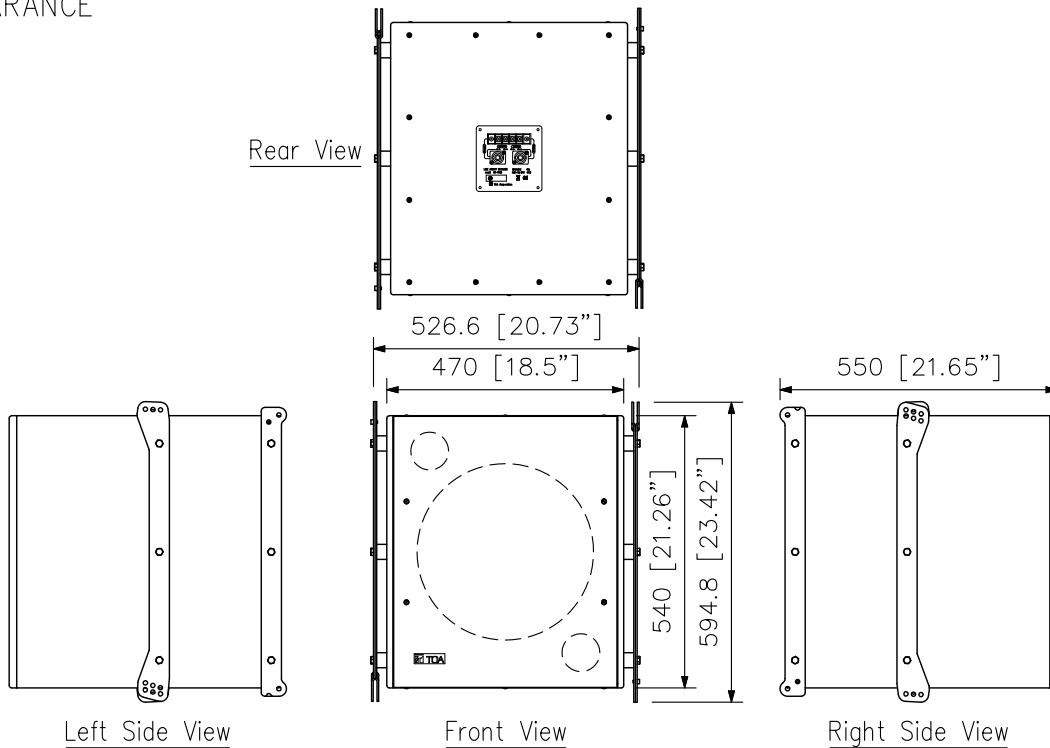

UNIT:mm SCALE:1/15