

■DESCRIPTION

The TS-692L-AS is a Delegate unit for TOA Conference system, of which compact and lightweight design makes it easy to install and store. Placing the speech button in the ON position permits speech and disables the speaker to prevent feedback. If the speech button is placed in the OFF position, the microphone cannot be used but the speaker is turned on, allowing the voices from other conference units to be monitored.


The TS-692L-AS delegate unit come with a long microphone as standard accessory.

■SPECIFICATIONS


* 0 dB = 1 V

| | |
|-----------------------------|---|
| Power Source | 36 V DC, 30 mA or less (supplied from the Central Unit TS-690-AS) |
| Output | Headphone/Recording: $\phi 3.5$ mm, mini jack (3P: monaural) Internal speaker: 130 Ω , 200 mW |
| Control | Speech: Microphone, speaker on-off control by speech button Volume control: Headphone/Recording and internal speaker volume adjustable |
| Microphone unit (Accessory) | Electret condenser microphone Directivity: Unidirectional Impedance: 1.8 k Ω Sensitivity: -37 dB (1 kHz 0 dB = 1 V/Pa) Frequency response: 100 Hz - 13 kHz Length : 518 mm Weight: 105 g (0.23 lb) |
| Operating Temperature | 0 °C to +40 °C (32 °F to 104 °F) |
| Operating Humidity | 90 %RH or less (no condensation) |
| Finish | Upper case: ABS resin, metallic grey, paint Lower case: ABS resin, black |
| Dimensions | 145.3 (W) x 70.7 (H) x 150.5 (D) mm (5.72" x 2.78" x 5.93") (Excluding microphone unit) |
| Weight | 800 g (1.76 lb) (Excluding microphone unit) |
| Accessory | Long microphone unit.....1 |
| Option | Extension cord: YR-790-3-AS, YR-790-10-AS |


■ APPEARANCE

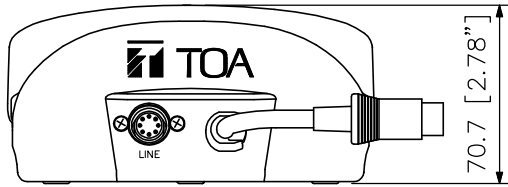


Rear View

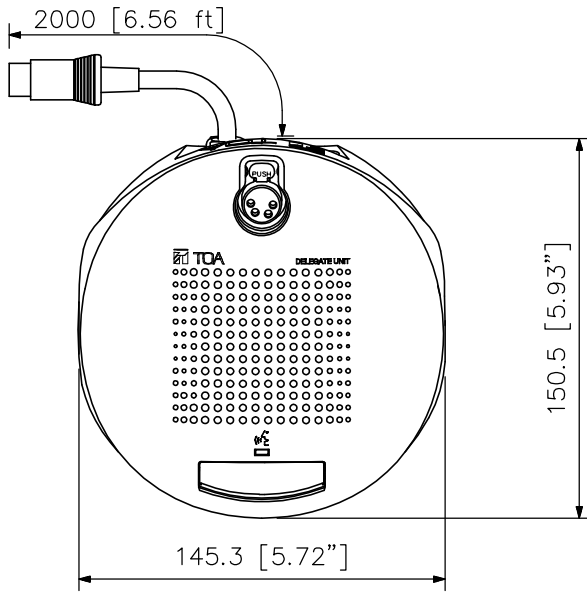

Top View

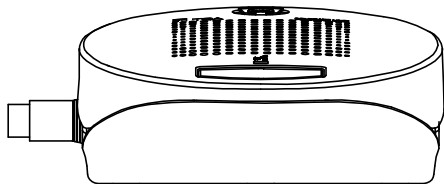

Front View

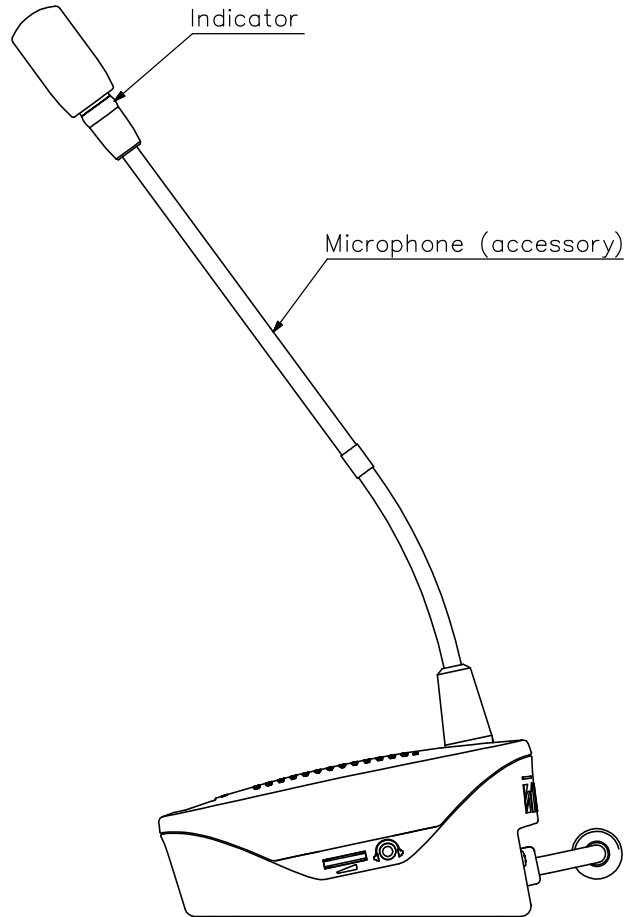

Side View

UNIT: mm SCALE: 1/3